




EncapSulite®

# WaterGuard® LED HO

WATERTIGHT LED HIGH-OUTPUT LIGHTING

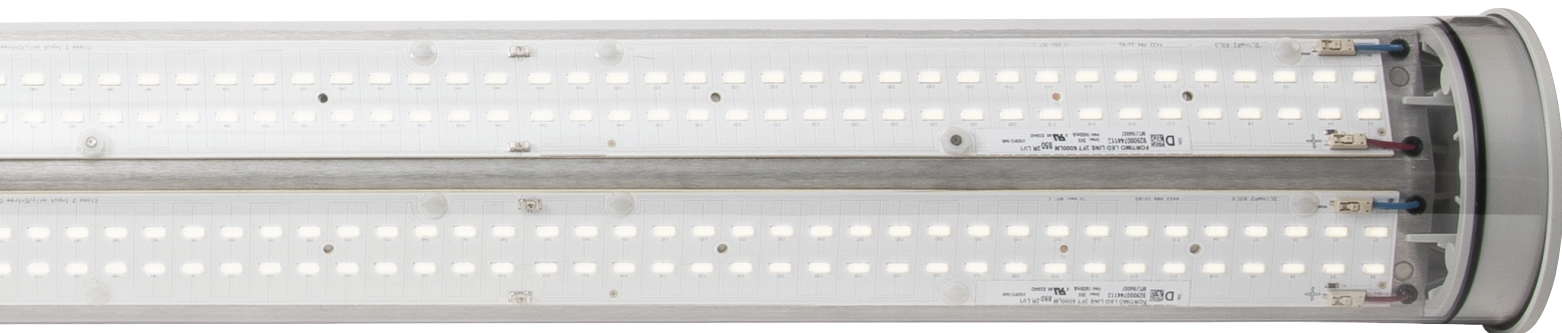

EncapSulite **WaterGuard LED HO** wash-down fixtures are ideal for a wide variety of applications including inspection lighting, food processing, dairies, poultry plants, meat processing, seacoast areas, car washes and parking garages. **WaterGuard** fixtures hold up to 1200psi high pressure wash-down while not collecting debris or water. Each fixture is equipped with stainless steel mounting hardware and power cord for easy installation. Teflon™ protection available for extreme conditions. All **WaterGuard** fixtures are UL, UL-EPH, and NSF certified for food safety.



## FEATURES

- Tubular Design – Low Maintenance
- 50,000hr Long-life LED's
- 5000K (other Kelvin temps available)
- Multi-Voltage 120-277V 50/60Hz
- Limited 3 Year Warranty
- IP67, 1200PSI Wash-Down
- UL1598, UL8750, NSF, FDA, USDA

## APPLICATIONS

- Inspection Lighting
- Food Processing
- Dairies
- Grocery Stores
- Poultry Plants
- Meat Processing
- Car Washes

**WARRANTY:** EncapSulite WaterGuard LED HO watertight fixtures are guaranteed for 3 years.

TOLL FREE (877) 227-8756 | WEB [www.encapsulite.com](http://www.encapsulite.com)




DATE

PART #

TYPE


PROJECT

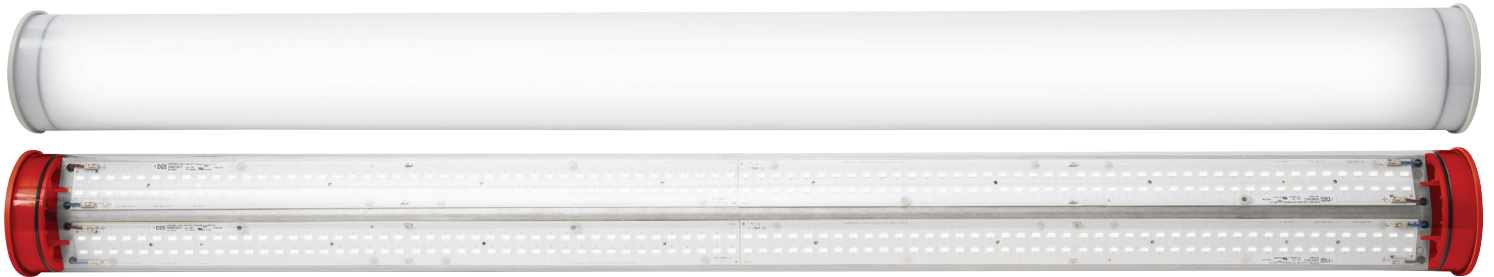

\* Fixture displays Emergency Power Option

### ORDERING INFORMATION

EXAMPLE: **WGP104LEDHO64W50KCLSMB**



### ORDERING LEGEND

**1. LENGTH**

- 2LEDHO32W: 2 foot (32 watts)
- 4LEDHO64W: 4 foot (64 watts)
- 8LEDHO128W: 8 foot (128 watts)

**2. KELVIN**

- 40K: 4000 Kelvin Temperature
- 50K: 5000 Kelvin Temperature

**3. FINISH**

- CL: Clear
- DW: Diffused White
- RF: Red Filter
- BF: Blue Filter
- AF: Amber Filter

**4. MOUNTING**

- SS: Stainless Steel Hanging Straps
- SMB: Stainless Steel Brackets

**5. OPTIONS**

- FEP: FEP Protection for Tube
- 3P: 3P Male Receptacle
- 3P6W: 3P Receptacle with 6ft Yellow Whip
- EP: Emergency Power (90 Minutes)  
*Available Only for 4ft and 8ft Models.*

*Fixtures are equipped with a SJTOW 18AWG 8ft power cord with plug.*

PART NUMBER	LENGTH (IN)	DIAMETER (IN)	WATTAGE	CRI	KELVIN	FINISH	VOLTAGE	MIN TEMP	MAX TEMP	LUMENS
WGP102LEDHO32W40KCL	24	4	32	> 80	4000	Clear	120-277	-40°F	100°F	4000
WGP102LEDHO32W40KDW	24	4	32	> 80	4000	White	120-277	-40°F	100°F	3700
WGP102LEDHO32W50KCL	24	4	32	> 80	5000	Clear	120-277	-40°F	100°F	4000
WGP102LEDHO32W50KDW	24	4	32	> 80	5000	White	120-277	-40°F	100°F	3700
WGP104LEDHO64W40KCL	48	4	64	> 80	4000	Clear	120-277	-40°F	100°F	8000
WGP104LEDHO64W40KDW	48	4	64	> 80	4000	White	120-277	-40°F	100°F	7000
WGP104LEDHO64W50KCL	48	4	64	> 80	5000	Clear	120-277	-40°F	100°F	8000
WGP104LEDHO64W50KDW	48	4	64	> 80	5000	White	120-277	-40°F	100°F	7000
WGP108LEDHO128W40KCL	96	4	128	> 80	4000	Clear	120-277	-40°F	100°F	16000
WGP108LEDHO128W40KDW	96	4	128	> 80	4000	White	120-277	-40°F	100°F	13500
WGP108LEDHO128W50KCL	96	4	128	> 80	5000	Clear	120-277	-40°F	100°F	16000
WGP108LEDHO128W50KDW	96	4	128	> 80	5000	White	120-277	-40°F	100°F	13500



## REPLACEMENT PARTS


### TUBE

*Replacement Tube Enclosure*

PWG052: 2ft Replacement Tube

PWG053: 4ft Replacement Tube

PWG054: 8ft Replacement Tube

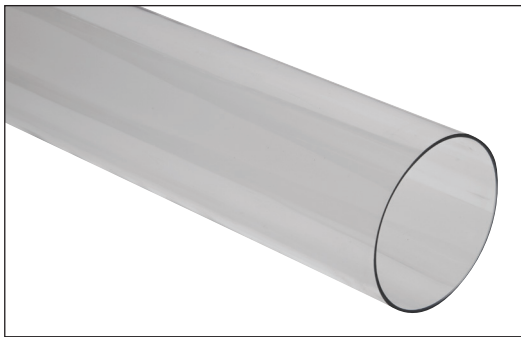

### END CAPS

*Includes Stainless Steel Hardware*


PWG030: (2) End Caps with Hardware



### DRIVER

*Replacement LED Driver*

PWG026: Replacement LED Driver

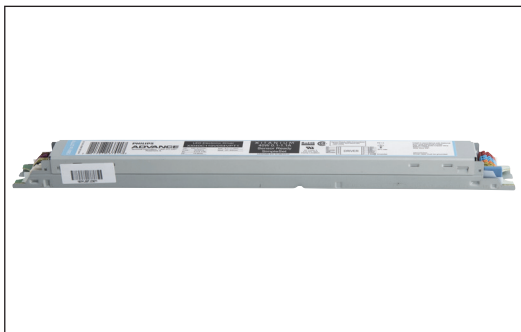

### MOUNTING OPTIONS

*Stainless Steel Mounting Bracket*

PWGBSMB100: SS Bracket



*Stainless Steel Hanging Strap*

PWGBSS100: SS Hanging Strap

