




EncapSulite®


SafeLight Panel Filters

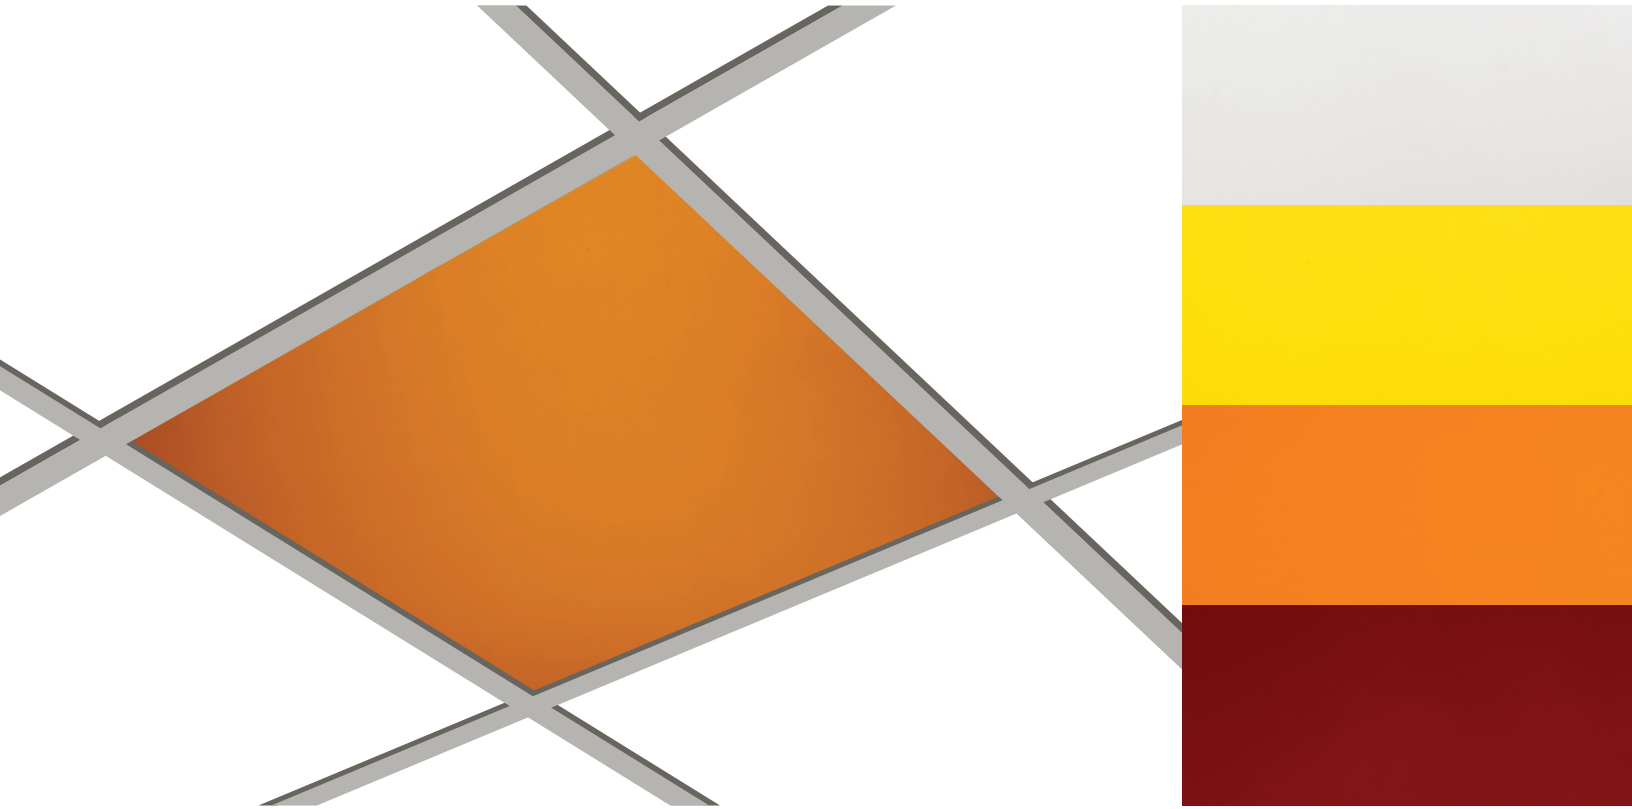

Laminated SafeLight Filters (0.015 thickness) are used with diffuser panels in recessed ceiling fixtures to provide maximum illumination and UV blocking.

ORDERING INFORMATION

EXAMPLE: 2X4C20PF



ORDERING LEGEND

1. LENGTH	2. FILTER	
2x2	C20	YG10
2x4	G10	R10

SAFELIGHT FILTER	CUT OFF	ORTHOCHROMATIC MATERIALS				CONTACT PROOFING	IR
		Lith Films	High Speed Films	Darkroom Contact	Blue Sensitive		
Ortho Red (R10)	610	•	•	•			
Yellow Gold (YG10)	500				•		
Yellow (G10)	475					•	
UV Daylight White (C20)	400				•		